

SR-3iA



Max. load capacity
at wrist: 3 kg




Max. reach:
400 mm

FANUC

Robot			Max.load capacity at wrist (kg)	Reach (mm)	Controlled axes	Repeatability (mm)	Mechanical weight (kg)	Motion range [°]						Maximum speed [°/s]						Moments (N-m)/Inertia (kg-m ²)			Push Force (N)	Protection	
Series	Version	Type						J1	J2	J3	J4	J5	J6	J1	J2	J3	J4	J5	J6	J4 Moment/ Inertia	J4 Moment/ Inertia	J4 Moment/ Inertia		Body standard/optional	Wrist & J3 arm standard/optional
SR	iA	3	3	400	4**	± 0.01 (J1, J2) ± 0.01 (J3) ± 0.004° (J4)	19	±142	±145	200 mm*	±720	-	-	720	780	1800 mm/s	3000	-	-	-/0.06	,	,	150	IP20	IP20

- not available * z axis ** Three-axis variant available

SR-3iA 4-axis

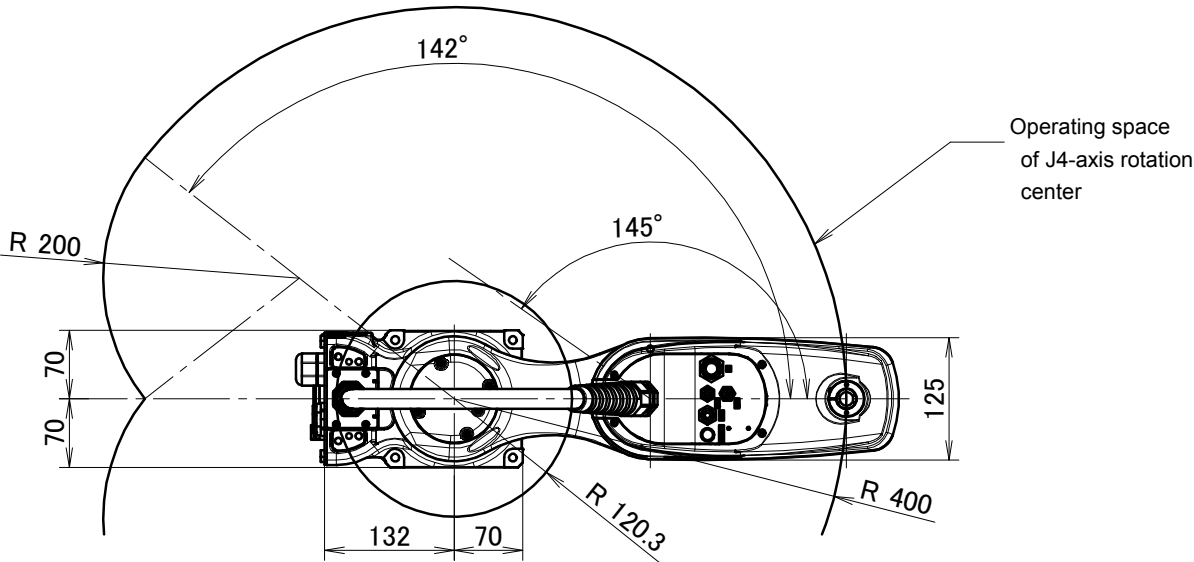

SR-3iA