

CR-4iA



Max. load capacity
at wrist: 4 kg



Max. reach:
550 mm

FANUC

Robot			Max. load capacity at wrist (kg)	Reach (mm)	Controlled axes	Repeatability (mm)	Mechanical weight (kg)	Motion range [°]						Maximum speed [°/s]						J4 Moment/ Inertia	J5 Moment/ Inertia	J6 Moment/ Inertia	Average Power consumption (kW)	Protection	
Series	Version	Type						J1	J2	J3	J4	J5	J6	J1	J2	J3	J4	J5	J6					Body standard	Wrist & J3 arm
CR	iA	4	4	550	6	± 0.01**	48	340/ 360***	150	354	380	200	720	500*	500*	500*	500*	500*	500*	8.86/ 2	8.86/ 2	4.9/ .67	0.5	IP67	IP67

● standard ○ on request - not available * max. cartesian speed 1000mm/sec ** Based on ISO9283 ***Option


CR-4iA

Standard Model



Operating space
of J5-axis rotation center

J5-axis
rotation center

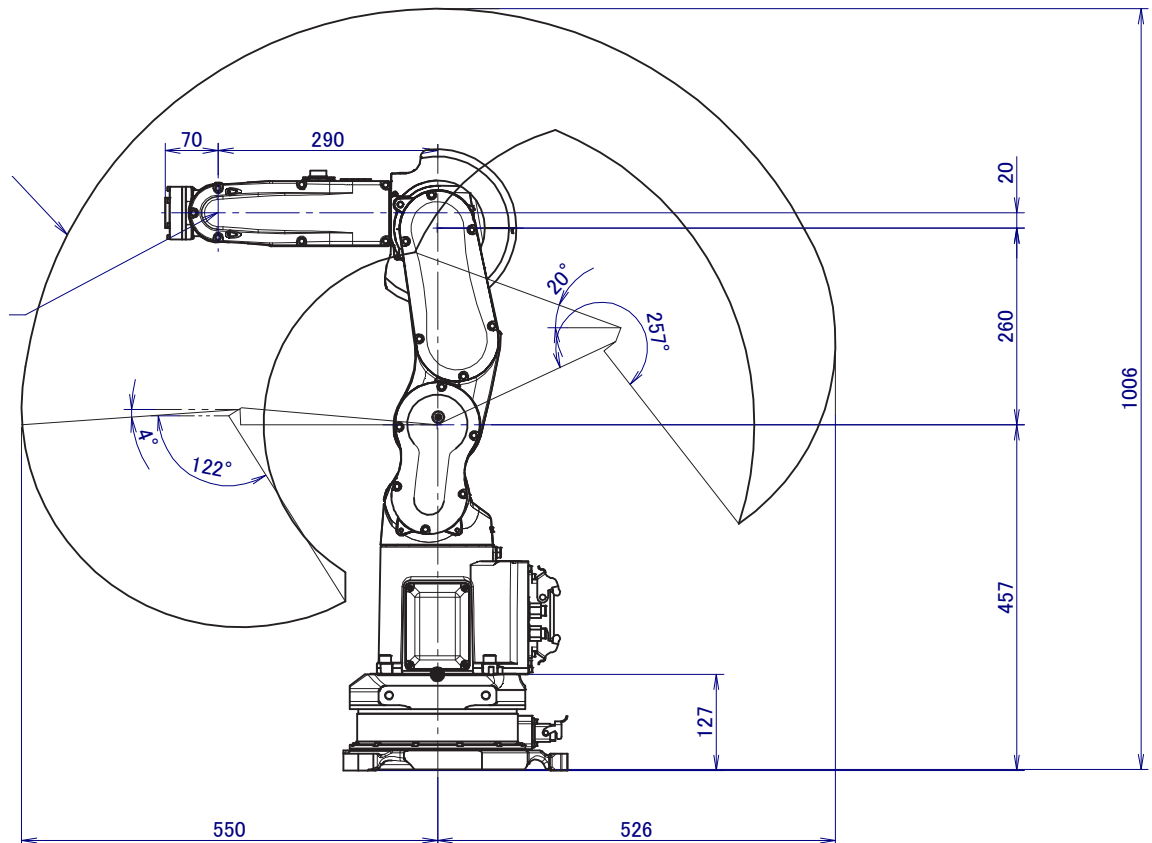

CR-4iA