R-2000/270R-31E

Max. load capacity at wrist: 270 kg

Max. reach: 3095 mm

FANUC

Robot							Motion range (°)						Maximum speed (°/s) ***						Moments (N·m)/Inertia (kg·m²)				Protection	
Series	Version	Max.load capacity at wrist (kg)	Reach (mm)	Controlled axes	Repeatability (mm)	Mechanical weight (kg)	J1	J2	J3	J4	J5	J6	J1	J2	J3	J4	J5	J6	J4 Moment/ Inertia	J5 Moment/ Inertia	J6 Moment/ Inertia	Average Power consumption (kW)	Body standard/optional	Wrist & J3 arm standard/optional
R-2000	E	270	3095	6	± 0.05*	1570**	370	200	395	720	250	720	110	90	90	130	130	210	1770/ 320	1770/ 320	1020/ 230	3	-	IP67

● standard ○ on request - not available * Based on ISO 9283 ** Without controller *** During short distance motions, the axis speed may not reach the maximum value stated.
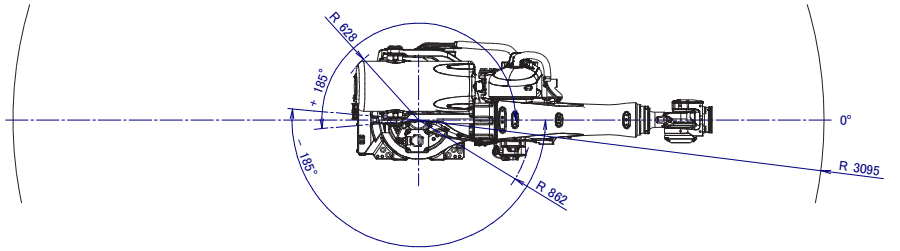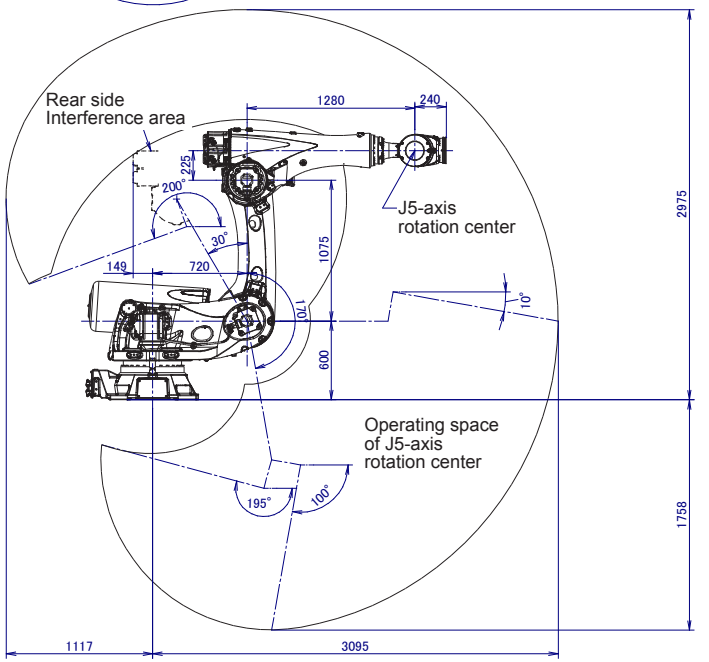
R-2000/270R-31E Rack mount