

Technical Data Sheet

AQUAMODUL® ANCILLARY PRODUCTS

Roof Finishes

Aquamodul Ancillary Products are for use with the Axter blue roof Aquamodul system.

Aquamodul Connector


For use when two or more layers of Aquamodul Void Formers are used to form a structure. The Aquamodul Connectors are inserted between the layers to create stability and prevent lateral movement and shear resistance.



Product specifications		
Characteristics	Unit	Value
Product reference code		AQUAC
Length	mm	40
Width	mm	35
Weight per unit	g	10
Material		Polypropylene

Aquamodul Tie

For use to connect two or more Aquamodul Void Formers installed adjacently forming an interlocking raft. The Aquamodul Ties are inserted to create stability and provide tensile resistance.

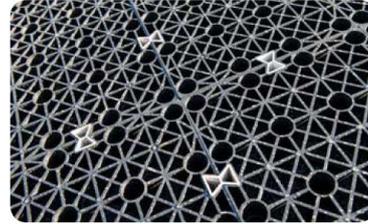

Product specifications		
Characteristics	Unit	Value
Product reference code		AQUAT
Length	mm	74
Width	mm	45
Depth	mm	34
Weight per unit	g	30
Material		Polypropylene

Axter Ltd reserves the right to modify and update this data at any time without prior notice. Only the latest version of this document is valid, available for download at www.axter.co.uk/downloads. Once downloaded, documents are uncontrolled. Users should always confirm they are referring to the latest version prior to use. Further assistance is available from Axter Ltd's Technical Support Team, email: technical@axterltd.co.uk, telephone: 01473 935008.

The intended use of this product should be verified with Axter Ltd prior to adoption to ensure its suitability and compliance with specifications, project requirements, industry regulations, legislation, good practice, installation techniques and all other relevant guidance. Axter Ltd accepts no liability for non-compliant use of this product.