

Technical Data Sheet

AQUAMODUL[®] DIFFUSER CHAMBERS

Roof Finishes

Aquamodul Diffuser Chambers are designed for use in conjunction with the Axter blue roof Aquamodul system. The Diffuser Chamber connects directly to the surrounding Void Formers to collect and filter rainwater into the surrounding storage system.


Key Benefits

- Engineered to provide controlled inlet water flow.
- Passive flow control and dispersal.
- Designed to be incorporated in the Aquamodul system with direct connection to surrounding Void Formers.
- Provides access for routine maintenance.
- The modules can be re-used at the end of service life.



Aquamodul 85mm Diffuser Chamber with 110mm Inlet

Designed for use in shallow podium deck constructions, the Aquamodul 85mm Diffuser Chamber collects rainwater via the 110mm Ø inlet pipe. The water filters through the perforated walls and is dispersed into the surrounding 85mm Void Formers. It is compatible with standard 110mm Ø push fit couplings.

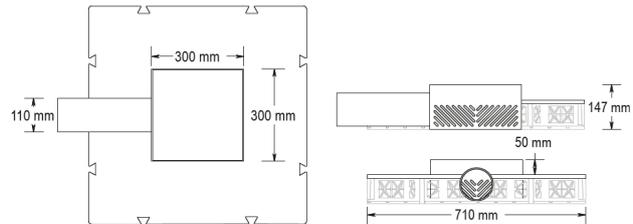


Product specifications		
Characteristics	Unit	Aquamodul 85mm Diffuser Chamber with 110mm Inlet
Product reference code		AQUADC/85-110
Material		HDPE/PP
Weight per module	kg	11.8
Length	mm	800
Width	mm	710
Depth	mm	147
Sump depth	mm	10
Inlet spigot Ø OD*	mm	110
Inlet spigot length	mm	90
Maximum flow	l/s	8

*OD = Outer diameter.

Aquamodul 150mm Diffuser Chamber with 110mm Inlet

Designed for use in shallow podium deck constructions, the Aquamodul 150mm Diffuser Chamber collects rainwater via the 110mm Ø inlet pipe. The water filters through the perforated walls and is dispersed into the surrounding 150mm Void Formers. It has an integral 50mm deep sump to effectively trap silt, and is compatible with standard 110mm Ø push fit couplings.

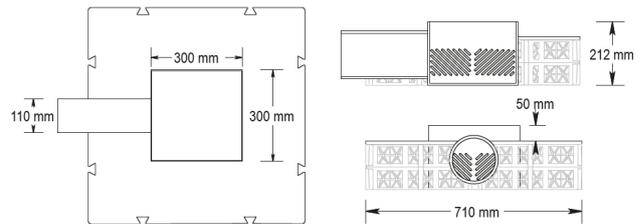


Product specifications		
Characteristics	Unit	Aquamodul 150mm Diffuser Chamber with 110mm Inlet
Product reference code		AQUADC/150-110
Material		HDPE/PP
Weight per module	kg	12
Length	mm	800
Width	mm	710
Depth	mm	212
Sump depth	mm	50
Inlet spigot Ø OD*	mm	110
Inlet spigot length	mm	90
Maximum flow	l/s	11

*OD = Outer diameter.



Aquamodul 150mm Diffuser Chamber with 160mm Inlet

Designed for use in shallow podium deck constructions, the Aquamodul 150mm Diffuser Chamber collects rainwater via the 160mm Ø inlet pipe. The water filters through the perforated walls and is dispersed into the surrounding 150mm Void Formers. It has an integral 50mm deep sump to effectively trap silt, and is compatible with standard 160mm Ø push fit couplings.

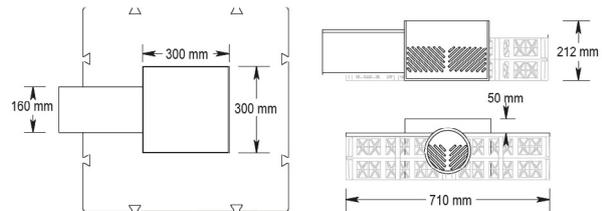

Product specifications		
Characteristics	Unit	Aquamodul 150mm Diffuser Chamber with 160mm Inlet
Product reference code		AQUADC/150-160
Material		HDPE/PP
Weight per module	kg	12.4
Length	mm	800
Width	mm	710
Depth	mm	212
Sump depth	mm	50
Inlet spigot Ø OD*	mm	160
Inlet spigot length	mm	90
Maximum flow	l/s	20

*OD = Outer diameter.

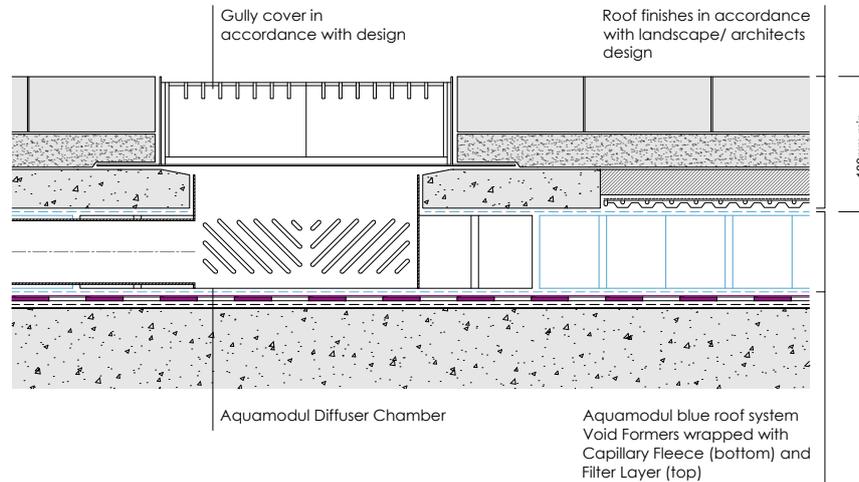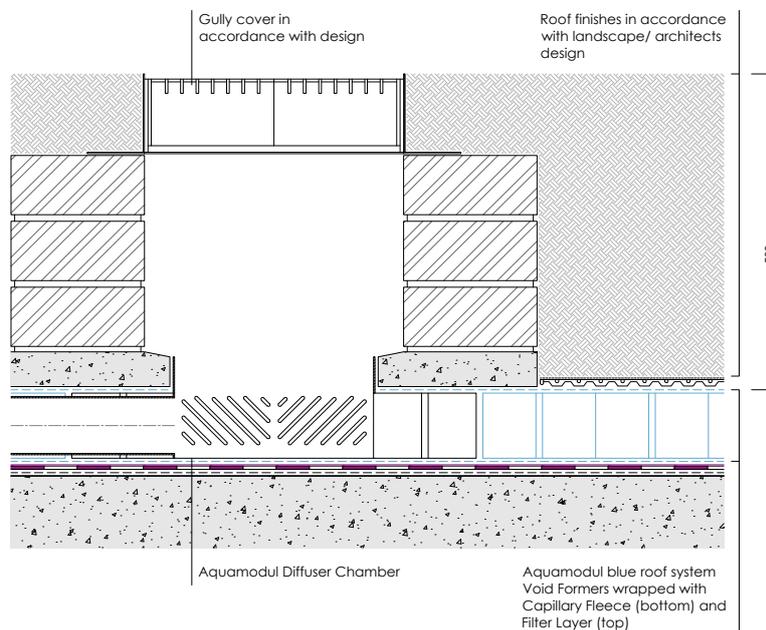Application 1 - minimum cover approximately 180mm***Application 2 - maximum cover approximately 500mm***

* Always refer to project specific detail drawings as project specific details may differ.

Axter Ltd reserves the right to modify and update this data at any time without prior notice. Only the latest version of this document is valid, available for download at www.axter.co.uk/downloads. Once downloaded, documents are uncontrolled. Users should always confirm they are referring to the latest version prior to use. Further assistance is available from Axter Ltd's Technical Support Team, email: technical@axterltd.co.uk, telephone: 01473 935008.

The intended use of this product should be verified with Axter Ltd prior to adoption to ensure its suitability and compliance with specifications, project requirements, industry regulations, legislation, good practice, installation techniques and all other relevant guidance. Axter Ltd accepts no liability for non-compliant use of this product.