


Install-Ready Palletizer with FANUC CRX-25iA Collaborative Robot

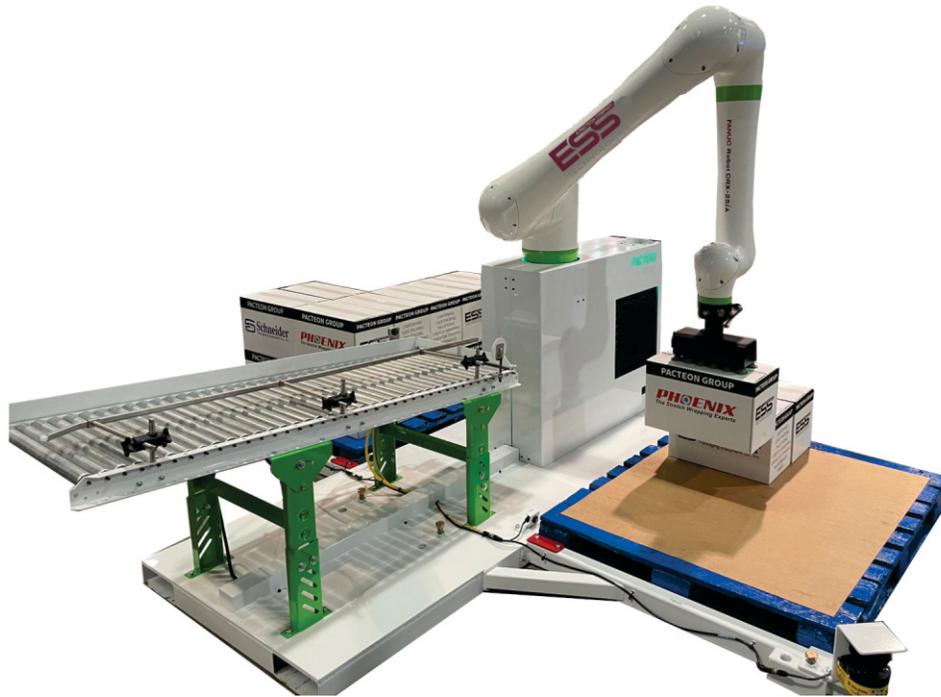

At-A-Glance

- 1-in-1-out layout
- 1-in-2-out layout
- Reliable FANUC robotics
- Portable and lightweight

Scan for More Information



Use With These Machines

- Horizontal Case Packer
- Vertical Case Packer
- Robotic Case Packer
- Semi-Automatic Stretch Wrapper

Specifications

Handles: All Vacuum-Pickable Products

Max. Payload: 30 lbs. (13.6kg)

Unit Load Height: 60" (1524mm)

Reach: 74.4" (1889mm)

Min. Case Dimensions: 6.5" x 4.5" x 4"

Max. Case Dimensions: 22" x 16" x 16"

Power Requirements: 120V, Single Phase, 15 Amp

Safety: Meets ANSI/PMMA B155.1 Safety Standards



ESS Technologies, Inc.
3160 State Street
Blacksburg, VA 24060
(540) 961-5716 • info@esstechnologies.com
www.esstechnologies.com